



ODIN-1G-3S-6P-E

Enhanced 6-port 1Gbps test module


A 1GE test module with six ports and enhanced performance

The Odin-1G-3S-6P-E is a 6 port 1 Gigabit Ethernet test module. An enhanced version of Xena's entry level Odin-1G-3S-6P test module, the Odin-1G-3S-6P-E offers more transmit streams (256 instead of 32) six modifiers per stream (instead of 2) as well as support for Priority Flow Control.

The Odin-1G-3S-6P-E is available for both the 4U 12-slot ValkyrieBay chassis and the robust transportable 1U ValkyrieCompact chassis, and is provided with Xena's full range of complimentary software.

TOP FEATURES - Odin-1G-3S-6P-E

- Supports Priority Flow Control (PFC)
- 256 tx streams
- 6 modifiers per stream
- Free software (incl. ValkyrieManager, ValkyrieCLI, Valkyrie3918, Valkyrie2544, Valkyrie1564 and Valkyrie2889)
- Three years' free software updates
- Three years' hardware warranty
- Free tech support product lifetime

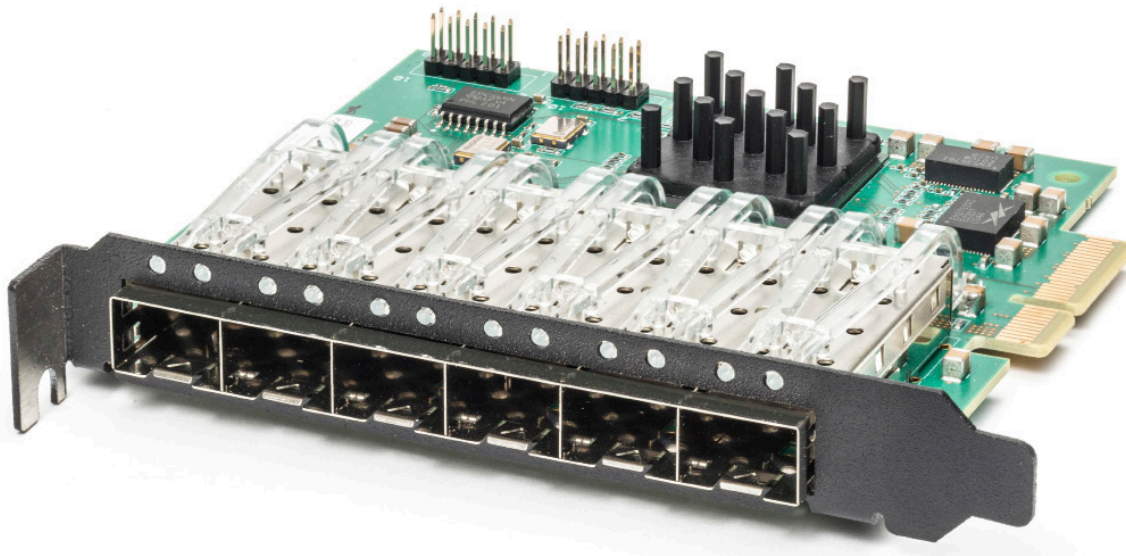

PORT LEVEL FEATURES

Interface category	10/100/1000M Ethernet
Number of test ports	6 x 10/100/1000M
Interface options	10/100/1000BASE-T ¹⁾ or 1000BASE-X (SFP-MSA) or 100BASE-FX ²⁾ or 100BASE-BX ²⁾
Number of physical interface form factor	6 x SFP
Port statistics ³⁾	Link state, FCS errors, pause frames, ARP/PING, error injections, training packet All traffic: RX and TX Mbit/s, packets/s, packets, bytes Traffic w/o test payload: RX and TX Mbit/s, packets/s, packets, bytes
Adjustable Inter Frame Gap (IFG)	Configurable from 16 to 56 bytes, default is 20B (12B IFG + 8B preamble)
Transmit line rate adjustment	Ability to adjust the effective line rate by forcing idle gaps equivalent to -1000 ppm (increments of 10 ppm)
ARP/PING	Supported (configurable IP and MAC address per port)
Field upgradeable	System is fully field upgradeable to product releases (FPGA images and Software)
Histogram statistics ³⁾	Two real-time histograms per port. Each histogram can measure one of RX/TX packet length, IFG, jitter, or latency distribution for all traffic, a specific stream, or a filter
Tx disable	Enable/disable of optical laser or copper link
IGMPv2 multicast join/leave	IGMPv2 continuous multicast join, with configurable repeat interval
Oscillator characteristics	<ul style="list-style-type: none"> • Initial Accuracy is 3 ppm • Frequency drift over 1st year: +/- 3 ppm (over 15 years: +/- 15 ppm) • Temperature Stability: +/- 20 ppm (Total Stability is +/- 35 ppm)



TRANSMIT ENGINE

Number of transmit streams per port	256 (wire-speed) continuous Each stream can generate millions of traffic flows through the use of field modifiers
Test payload insertion per stream	Wire-speed packet generation with timestamps, sequence numbers, and data integrity signature optionally inserted into each packet.
Stream statistics ³⁾	TX Mbit/s, packets/s, packets, bytes, FCS error, Pause
Bandwidth profiles	Burst size and density can be specified. Uniform and bursty bandwidth profile streams can be interleaved
Field modifiers	16-bit header field modifiers with inc, dec, or random mode. Each modifier has configurable bit-mask, repetition, min, max, and step parameters. 6 modifiers per stream.
Packet length controls	Fixed, random, butterfly, and incrementing packet length distributions. Packet length from 56 to 16384 bytes
Packet payloads	Repeated user specified 1 to 18B pattern, a 8-bit incrementing pattern
Error generation	Undersize length (56B min) and oversize length (16384 max.) packet lengths, injection of sequence, disorder, payload integrity, and FCS errors
TX packet header support and RX autodecodes	Ethernet, Ethernet II, VLAN, ARP, IPv4, IPv6, UDP, TCP, LLC, SNAP, GTP, ICMP, RTP, RTCP, STP, MPLS, PBB, or fully specified by user
Packet scheduling modes	<ul style="list-style-type: none"> • Normal (stream interleaved mode). Standard scheduling mode, precise rates, minor variation in packet inter-frame gap. • Strict Uniform. New scheduling mode, with 100% uniform packet inter-frame gap, minor deviation from configured rates. • Sequential packet scheduling (sequential stream scheduling). Streams are scheduled continuously in sequential order, with configurable number of packets per stream. • Burst. Packets in a stream are organized in bursts. Bursts from active streams form a burst group. The user specifies time from start of one burst group till start of next burst group.

RECEIVE ENGINE

Number of traceable Rx streams per port	648 (wire-speed)
Automatic detection of test payload for received packets	Real-time reporting of statistics and latency, loss, payload integrity, sequence error, and disorder error checking
Jitter measurement	Jitter (Packet Delay Variation) measurements compliant to MEF10 standard with 8 ns accuracy. Jitter can be measured on up to 32 streams.
Stream statistics ³⁾	<ul style="list-style-type: none"> • RX Mbit/s, packets/s, packets, bytes. • Loss, payload integrity errors, sequence errors, disorder errors • Min latency, max latency, average latency • Min jitter, max jitter, average jitter
Latency measurements accuracy	±16/32 ns (opto/elec)
Latency measurement resolution	8 ns (Latency measurements can calibrate and remove latency from transceiver modules)
Number of filters:	6 x 64-bit user-definable match-term patterns with mask, and offset 6 x frame length comparator terms (longer, shorter) 6 x user-defined filters expressed from AND/OR'ing of the match and length terms.
Filter statistics ³⁾	Per filter: RX Mbit/s, packets/s, packets, bytes.

CAPTURE

Capture criteria	All traffic, stream, FCS errors, filter match, or traffic without test payloads
Capture start/stop triggers	Capture start and stop trigger: none, FCS error, filter match
Capture limit per packet	16 – 16384 bytes
Wire-speed capture buffer per port	16 kB
Low speed capture buffer per port (10Mbit/sec)	4096 packets (any size)

- 1) Requires Finisar SFP transceivers FCLF-8521-3 with sgmiid host interface 3) Counter size: 64 bits
2) Requires Source Photonics SFP transceivers with sgmiid host interface

SPECIFICATIONS

Dimensions

- 1U ValkyrieCompact**
- W: 19" (48.26 cm)
 - H: 1.75" (4.45 cm)
 - D: 9.8" (25 cm)
 - Weight: 10 lbs (4.5 kg)

- 4U ValkyrieBay**
- W: 19" (48.26 cm)
 - H: 7" (17.78 cm)
 - D: 19.7" (50 cm)
 - Weight: 36.4 lbs (16.5 kg)
 - Slots: 1 slot in Valkyrie-Bay

Power

- AC Voltage: 100-240V
- Frequency: 50-60Hz
- Max. Power: 90W (ValkyrieCompact) / 120W (ValkyrieBay)
- Max. Current: 0.8A with 120V supply, and 0.4A with 240V supply

Regulatory

- FCC (US), CE (Europe)

Environmental

- Operating Temperature: 10 to 35° C
- Storage Temperature: -40 to 70° C
- Humidity: 8% to 90% non-condensing

Max. Noise

- ValkyrieCompact: 49 dBA
- ValkyrieBay: 58.5 dBA



Test. Improve. Repeat.
www.xenanetworks.com
 Sales contact: sales@xenanetworks.com